

"DU" TYPE ROTARY SLIPS


"DU Rotary Slips are designed for long trouble free service. They are made of alloy steel and heat-treated for strength and resistance to wear. Both slips are for use in API tapered bowls. The "DU" Regular has a 12" long gripping surface and is designed for wells 8000' or less. The "DU Long has a 16" long gripping surface and is designed for deeper wells and heavier drill strings.



"DU" TYPE ROTARY SLIPS COMPLETE

	SLIP BODY SIZE	TYPE	WT.
03-114-F	4 1/2"	DU/REGULAR	123.00
03-115-F	4 1/2"	DU/LONG	150.00
03-116-F	5 1/2"	DU/REGULAR	128.00
03-117-F	5 1/2"	DU/LONG	162.00
03-112-SDU-F	5 1/2"	SDU/LONG	180.00
03-118-F	7"	DU/REGULAR	132.00
03-119-F	7"	SDU/LONG	192.00

ALL "DU" TYPE SLIPS ARE AVAILABLE WITH STEEL HANDLES UPON REQUEST

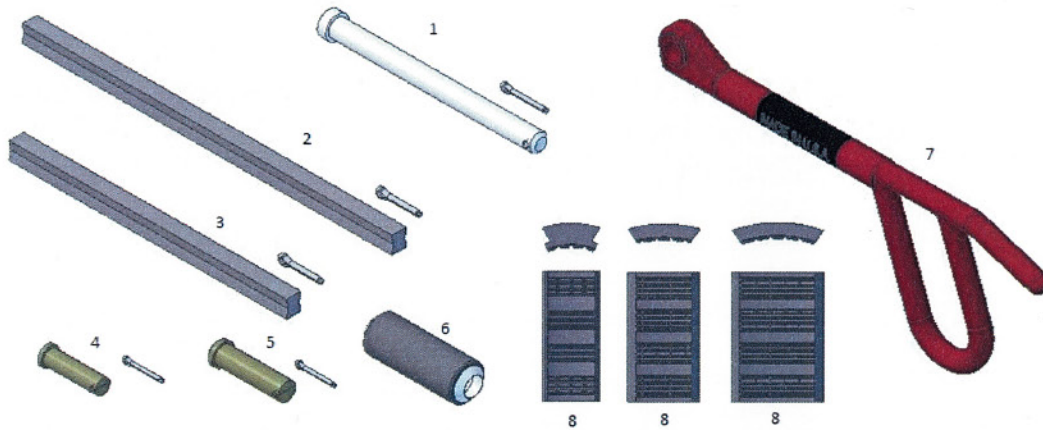

REPLACEMENT PARTS FOR "DU" ROTARY SLIPS

ITEM#	DESCRIPTION	*SPARES	#REQ.	REF.#	WT.
03-102	N/P REAR HANDLE	1	1	7613-5195	5.00
03-101	N/P FRONT HANDLE	2	2	7613-A-157	4.00
03-105	1 HINGE PIN	2	2	7613-A-12	1.25
03-103	2 DU LONG LINER KEY	3	3	7613-A-67	1.75
03-104	3 DU REG. LINER KEY	3	3	7613-A-52	1.50
03-106	4 FRONT HANDLE PIN	2	2	7613-B-12	.25
03-107	5 REAR HANDLE PIN	1	1	7613-C-12	.38
03-108	6 HINGE SPRING ASSY.	2	2	7613-211	1.25
03-300-R	7 SAFETY FLEX HANDLE (REAR)	1	1	7613-5190	5.00
03-300-F	7 SAFETY FLEX HANDLE (FRONT)	2	2	7613-5190	5.00

*RECOMMENDED SPARE PARTS FOR 1 YEAR OPERATION

INSERTS FOR 4 1/2" "DU" ROTARY TYPE SLIPS AND FOR 4 1/2" "TS-100" SPIDER SLIPS

	DESCRIPTION	REF.#	WT.	RMET# (FULL FACE INSERTS)
03-120	4 1/2" X 4 1/2"	7613-A-81	.75	03-210
	4 1/2" X 4 3/8"	N/A	.80	03-213
	4 1/2" X 4 1/4"	N/A	.85	03-216
	4 1/2" X 4 1/8"	N/A	.90	03-219
03-121	4 1/2" X 4"	7613-FF-81	1.00	03-221
	4 1/2" X 3 3/4"	N/A	1.75	03-224
03-122	4 1/2" X 3 1/2"	7613-C-82	1.50	03-227
	4 1/2" X 3 3/8"	N/A	1.65	03-229
	4 1/2" X 3 1/4"	N/A	1.75	03-228
	4 1/2" X 3 1/8"	N/A	1.85	03-230
	4 1/2" X 3"	N/A	1.90	03-231
03-123	4 1/2" X 2 7/8"	7613-B-82	2.00	03-233
03-124	4 1/2" X 2 3/8"	7613-A-82	2.25	03-236
03-125	4 1/2" X 2 1/16"	7613-M-82	2.50	03-237
03-126	4 1/2" X 1.900"	7613-H-82	2.75	03-238
03-127	4 1/2" X 1.660"	N/A	2.80	03-239

INSERTS FOR 5 1/2" "DU" ROTARY TYPE SLIPS AND 5 1/2" "TS-100" SLIPS

	DESCRIPTION	REF.#	WT.	RMET# (FULL FACE INSERTS)
	5 1/2" X 5 3/4"	N/A	.85	03-241
03-130	5 1/2" X 5 1/2"	7613-H-81	1.00	03-240
03-131	5 1/2" X 5"	7613-G-81	1.50	03-243
	5 1/2" X 4 3/4"	N/A	1.75	03-246
03-132	5 1/2" X 4 1/2"	7613-E-81	2.00	03-249
	5 1/2" X 4 3/8"	N/A	2.10	03-247
	5 1/2" X 4 1/4"	N/A	2.15	03-252
	5 1/2" X 4 1/8"	N/A	2.20	03-255
03-133	5 1/2" X 4"	N/A	2.25	03-258
	5 1/2" X 3 3/4"	N/A	2.28	03-261
03-134	5 1/2" X 3 1/2"	7613-E-82	2.31	03-264
	5 1/2" X 3 1/4"	N/A	2.38	03-266
	5 1/2" X 3 1/8"	N/A	2.45	03-268
	5 1/2" X 3"	N/A	2.52	03-270
	5 1/2" X 2 7/8"	N/A	2.60	03-275
	5 1/2" X 2 3/8"	N/A	2.80	03-277

INSERTS FOR 7" "SDU" ROTARY TYPE SLIPS

	DESCRIPTION	REF.#	WT.
03-140	7" X 7"	7613-EE-81	1.25
03-141	7" X 6 5/8"	7613-DD-81	1.75
03-146	7" X 5 7/8"	N/A	3.00
03-142	7" X 5 1/2"	7613-Z-81	3.25
03-143	7" X 5"	7613-Y-81	3.75
03-144	7" X 4 1/2"	7613-W-81	4.00

**NOTE: "DU" REGULAR REQUIRES 18 INSERTS PER SET. "DU" LONG REQUIRES 24 INSERTS PER SET
4 1/2" & 5 1/2" "TS-100" SLIPS REQUIRE 12 INSERTS PER SET
* 1 SET INSERTS PER PIPE SIZE RECOMMENDED FOR 1 YEAR SPARES**