


"K-25" LIGHT WEIGHT TUBING TONG

K-25 Tubing Tong has a wide range from 1.050 thru 2 7/8", and is light-weight with a wrap-around design providing approximately 300 deg. die contact. This prevents crushing or cutting of thin wall tubing. The tong can be used by hand or with a rope block and cat line, when making-up or breaking-out tubing. They are made of high alloy steel, heat-treated for strength and wear, and then tested. The RMET K-25 light-weight tubing tong has a 2,000 ft.-lb maximum torque rating. All tongs are pull-tested and complete documentation is available with each tong.



	DESCRIPTION	WT.
05-101	K-25 TONG COMPLETE LESS DIES, ROPE GUIDE & HANGER	16.50
05-102	K-25 TONG COMPLETE LESS DIES w/ROPE GUIDE & HANGER	21.00

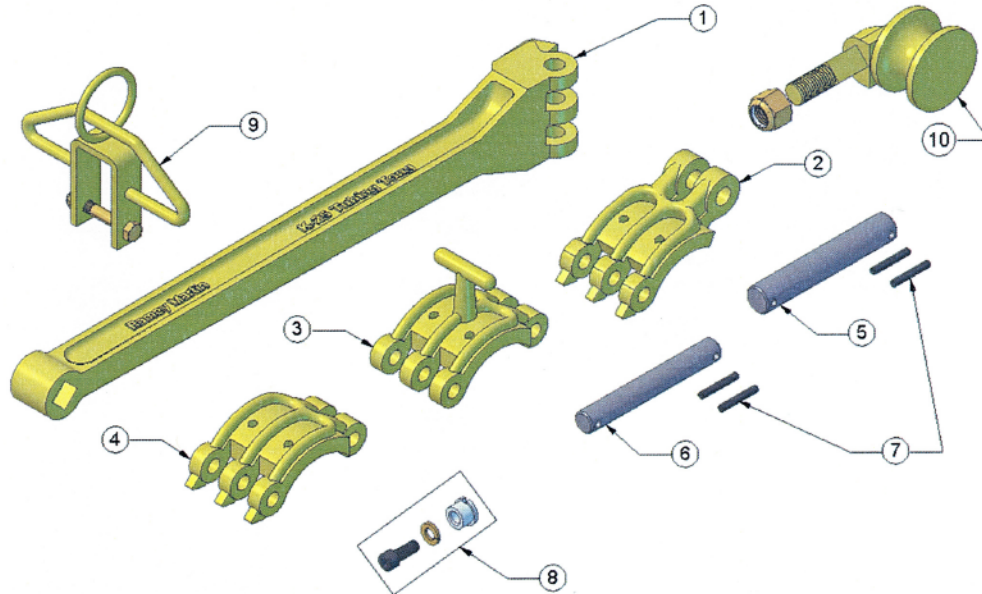

REPLACEMENT PARTS FOR K-20 & K-25 TUBING TONG

ITEM#	DESCRIPTION	#REQ.	*SPARES	WT.
05-114	1 TONG LEVER F/ K25 TONG	1		9.75
05-106	2 K-25 LEVER JAW	1		2.12
05-108	3 K-25 CENTER JAW	1		2.75
05-107	4 K-25 LATCH JAW	1		2.12
05-104	5 TONG LEVER PIN	1	1	.37
05-103	6 TONG HEAD PIN	3	3	.12
05-117	7 RETAINER PINS	8	8	.03
05-105	8 TONG DIE BUSHING & SCREW	6	24	.06
05-113	9 ROLLOVER HANGER WITH SCREW AND NUT	1		1.75
05-109	10 K-20 OR K-25 ROPE GUIDE WITH NUT	1		2.75

DIES FOR K-20 AND K-25 REFER TO **PAGE 72**

*RECOMMENDED SPARE PARTS FOR ONE YEAR

RECOMMENDED DIES FOR ONE YEAR ORDER 3 FOR EACH SIZE REQUIRED

ALL PARTS ARE INTERCHANGEABLE WITH KELCO** K-20 & K-25 TUBING TONGS