


TYPE "B" ROTARY SLIP

	DESCRIPTION	WT.
19-450-F	RMET TYPE "B" ROTARY SLIP COMPLETE W/ FLEX HANDLES	134

Type "B" Rotary Slip is designed for light to medium well drilling operations. They are made of alloy steel and heat-treated for strength and resistance to wear. It's standard size ranges from 2 1/16 to 4 1/2 and is used in API tapered bowls.

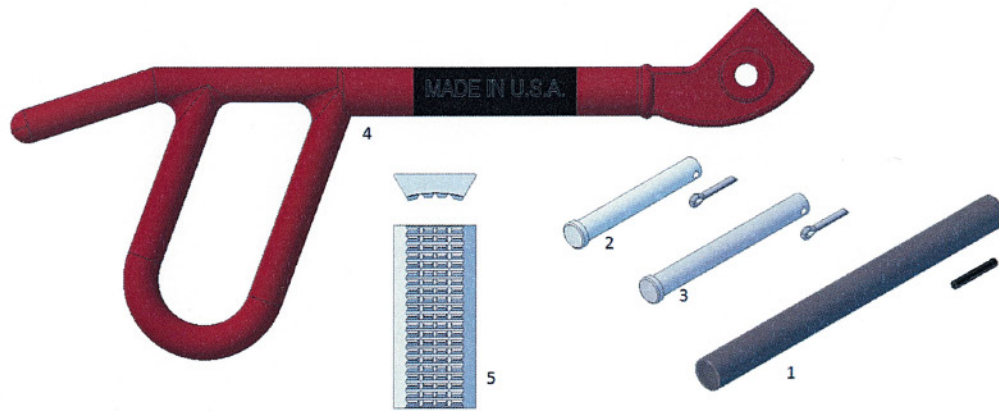

REPLACEMENT PARTS FOR RMET TYPE "B" ROTARY SLIPS

	ITEM#	DESCRIPTION	REF#	#REQ.	WT.
	1	HINGE PIN	737-000-0500	2	1.12
	N/P	RIGHT HANDLE	737-000-0300	1	5.35
	2	HANDLE PIN	737-000-0400	3	.25
	N/P	REAR HANDLE	737-000-0200	1	5.50
	N/P	LEFT HANDLE	737-000-0100	1	5.35
	3	INSERT RET. PIN	737-000-0600	3	.30
	4	FLEX HANDLE	N/A	3	5.00
	5	4-1/2" X 4-1/2"	757-044-0144	18/24	.85
	5	4-1/2" X 4"	757-044-0140	18/24	1.20
	5	4-1/2" X 3-1/2"	757-044-0134	18/24	1.75
	5	4-1/2" X 2-7/8"	757-044-0127	18/24	2.00
	5	4-1/2" X 2-3/8"	757-044-0123	18/24	2.15
	5	4-1/2" X 2-1/16"	N/A	18/24	2.45

ALL "B" TYPE SLIPS ARE AVAILABLE WITH STEEL HANDLES UPON REQUEST