


“DCS” DRILL COLLAR SLIPS

“DCS” Type Drill Collar Slip has a multi-segment design to give a full wrap-around to insure a proper slip setting. The slips are made of alloy steel and heat-treated for strength and long life. For added safety, the RMET “DCS” Type Drill Collar Slip is also provided with safety flex handles as a standard option.

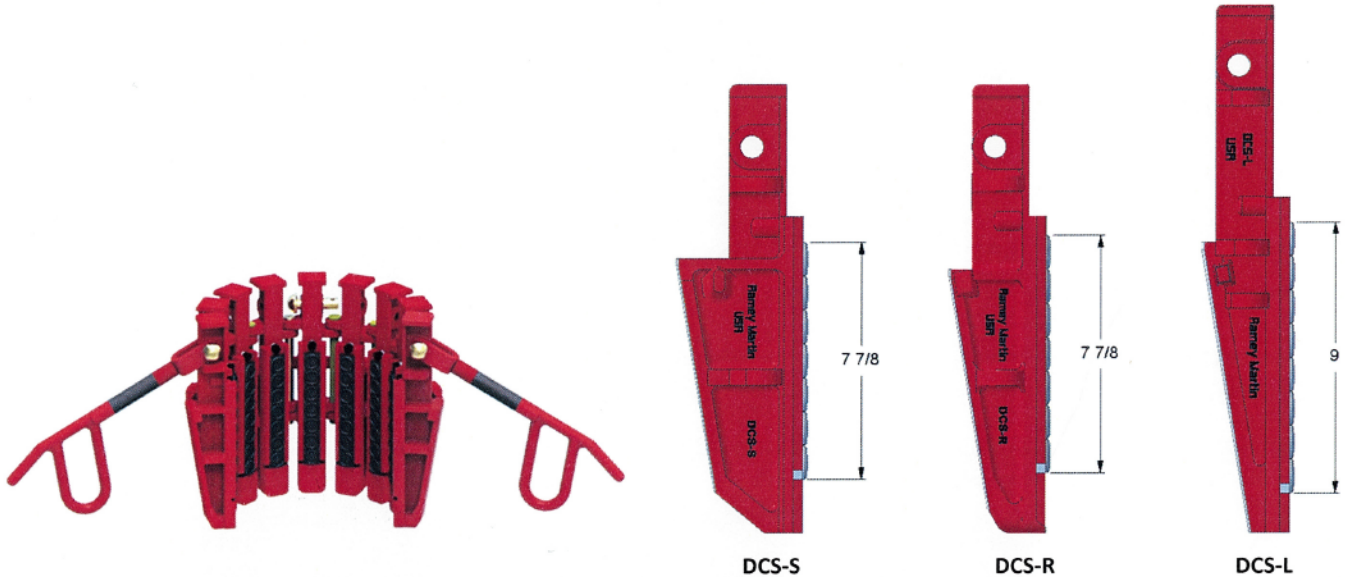

RMET “DCS” DRILL COLLAR SLIPS COMPLETE

	DRILL COLLAR SIZE/ SLIP RECESS	TYPE SLIP	TOTAL SEGMENTS	WT.
16-120-F	3" - 4"	DCS-S	7	112
16-121-F	4" - 4 7/8"	DCS-S	7	103
16-122-F	4 1/2" - 6"	DCS-R	9	120
16-123-F	5 1/2" - 7"	DCS-R	9	112
16-125-F	5 1/2" - 7"	DCS-L	11	172
16-126-F	6 3/4" - 8 1/4"	DCS-L	11	154
16-127-F	8" - 9 1/2"	DCS-L	12	173
16-128-F	8 1/2" - 10"	DCS-L	13	185
16-129-F	9 1/4" - 11 1/4"	DCS-L	14	198
16-130-F	11" - 12 3/4"	DCS-L	17	213
16-131-F	12" - 14"	DCS-L	17	207

ALL “DCS” TYPE SLIPS ARE AVAILABLE WITH STEEL HANDLES UPON REQUEST


NOTE: SLIP SIZES 3" - 9 1/2" FOR USE IN API OR #3 BOWL

SLIP SIZES 8 1/2" - 11 1/4" FOR USE IN #2 BOWL

SLIP SIZES 11" - 14" FOR USE IN #1 BOWL

ALL PARTS ARE INTERCHANGEABLE WITH CORRESPONDING DESIGN “DCS” TYPE
DRILL COLLAR SLIPS

“DCS” DRILL COLLAR SLIPS

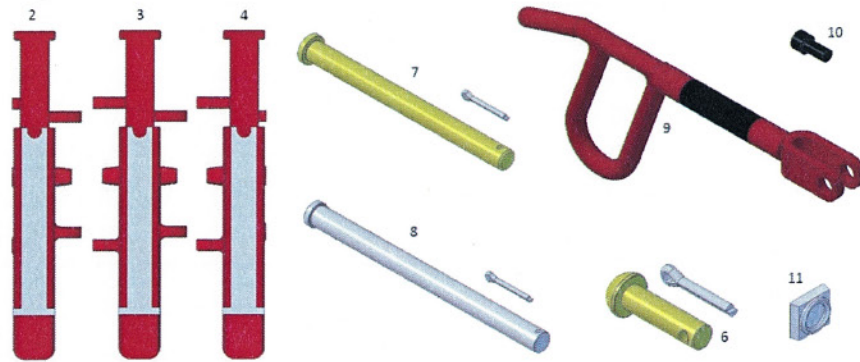

REPLACEMENT PARTS FOR RMET “DCS” DRILL COLLAR SLIPS

RMET#	ITEM#	DESCRIPTION	*SPARES	SIZE	#REQ.	REF.#	WT.
14-104	N/P	FRONT HANDLE	2	3" - 14"	2	3765	3.50
16-102	2	LEFT HAND SEGMENT f/DCSS		3" - 4 7/8"	1	2569	11.00
16-105	2	LEFT HAND SEGMENT f/DCSR		4 1/2" - 7"	1	2555	10.00
16-108	2	LEFT HAND SEGMENT f/DCSL		5 1/2" - 14"	1	2511	12.00
16-103	3	INTERMEDIATE SEGMENT f/DCS-S		3" - 4 7/8"	5	2570	11.00
16-106	3	INTERMEDIATE SEGMENT f/DCS-R		4 1/2" - 7"	7	2556	10.00
16-109	3	INTERMEDIATE SEGMENT f/DCS-L		5 1/2" - 14"	**	2512	12.00
16-104	4	RIGHT HAND SEGMENT f/DCS-S		3" - 4 7/8"	1	2568	11.00
16-107	4	RIGHT HAND SEGMENT f/DCS-R		4 1/2" - 7"	1	2554	10.00
16-110	4	RIGHT HAND SEGMENT f/DCS-L		5 1/2" - 14"	1	2510	12.00
14-103	N/P	REAR HANDLE	1	3" - 10"	1	3766	4.00
14-103	N/P	REAR HANDLE	1	9 1/4" - 14"	2	3766	4.00
14-105	6	HANDLE PIN	3	3" - 10"	3	3769	.50
14-105	6	HANDLE PIN	3	9 1/4" - 14"	4	3769	.50
14-106	7	HINGE PIN f/DCS-S	4	3" - 4 7/8"	6	2525	.70
14-106	7	HINGE PIN f/DCS-R	4	4 1/2" - 7"	8	2525	.70
16-112	8	HINGE PIN f/DCS-L	4	5 1/2" - 14"	**	2520	.70
23-112	9	SAFETY FLEX HANDLE	3	ALL	A/R	N/A	4.00
14-091	10	BUTTON RETAINER SCREW W/ HCLW		ALL	**	N/A	.05

* RECOMMENDED SPARE PARTS FOR 1 YEAR OF OPERATION

** VARIES DEPENDING ON SLIP SIZE

BUTTON AND CROSS REF. INSERTS F/ RMET “DCS” DRILL COLLAR SLIP

	SLIP TYPE	SIZE	QTY	WT./SET	RMET# (INSERT)	QTY	WT./SET
2628	DCS S	3" - 4"	49	13.00	2632	21	7
2620	DCS S	4" - 4 7/8"	49	8.00	2634	21	4
2628	DCS R	4 1/2" - 6"	63	16.00	2632	27	9
2620	DCS R	5 1/2" - 7"	63	11.00	2634	27	5
2513	DCS L	5 1/2" - 7"	88	19.00	2521	33	7
2630	DCS L	6 3/4" - 8 1/4"	88	15.00	2633	33	5
2630	DCS L	8" - 9 1/2"	96	16.00	2633	36	5
2627	DCS L	8 1/2" - 10"	104	26.00	2637	39	11
2630	DCS L	9 1/4" - 11 1/4"	112	19.00	2633	42	5
2625	DCS L	11" - 12 3/4"	136	20.00	2639	51	11
2630	DCS L	12" - 14"	136	22.00	2633	51	5

ALL PARTS ARE INTERCHANGEABLE WITH CORRESPONDING DESIGN “DCS” DRILL COLLAR SLIPS

RECOMMENDED SPARE PARTS INCLUDE 2 SETS OF INSERTS FOR EACH SLIP SIZE